

# 30W COB LED TRACK LIGHT

360° rotatable




## Features:

High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment.

## Application:

Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.


### T3021



2-wires Track holder




### T3031



3-wires Track holder




### T3043



4-wires Track holder



Size : mm

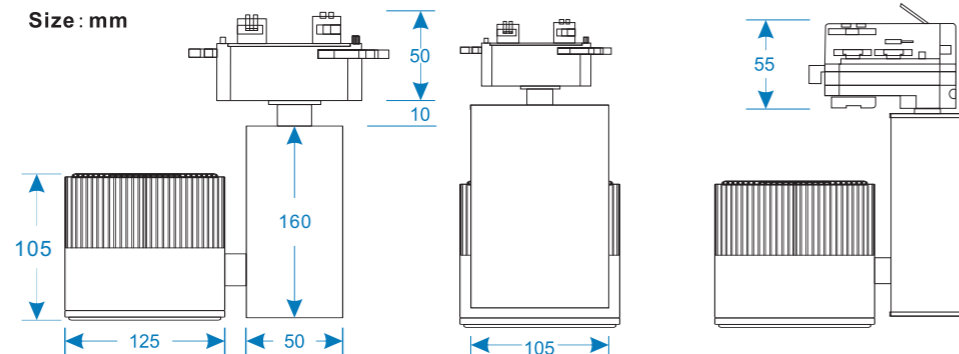


## Lamp Parameters :

	Standard	Super-bright
Input Voltage	AC100-277V or AC200-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	30W	
System Consumption	34.5W	
Led Initial Flux	2550-2750LM	3300-3700LM
Color Rendering Index	>80	
Working Temperature	-40°C ~ +55°C	
Fireproof Class	V0	
Track light holder	2-wires, 3-wires, 4-wires,	
Color of housing	black,white,silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	


## Driver Parameters :

Brand	Lifud
Input	AC100-277V or AC200-240V
Output	DC18-30V,700mA
Power Factor	0.9-0.96
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali
MWANWELL:PLD-40-700 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
T3021 T3031 T3043	25°/55°	>80	3000K	2550LM	3300LM	AC100-277V AC200-240V
			4000K	2650LM	3500LM	
			6000K	2750LM	3700LM	

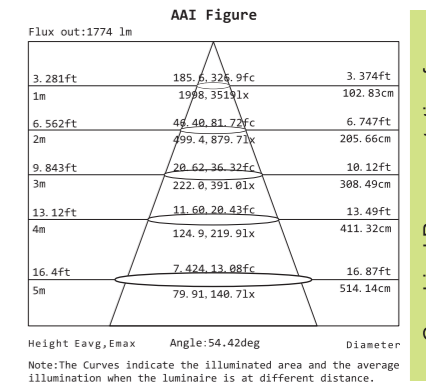


Graphical Representation for D30145 WW 55° (S)

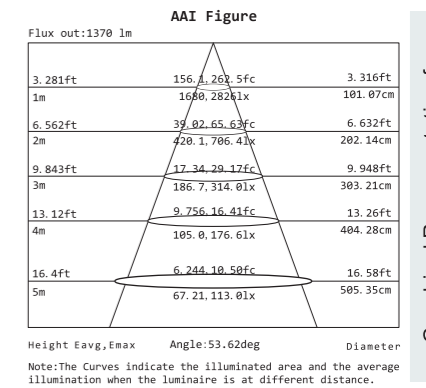

Graphical Representation for D30145 WW 55°

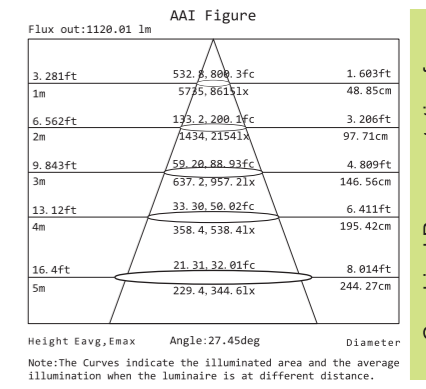

Graphical Representation for D30145 NW 25° (S)

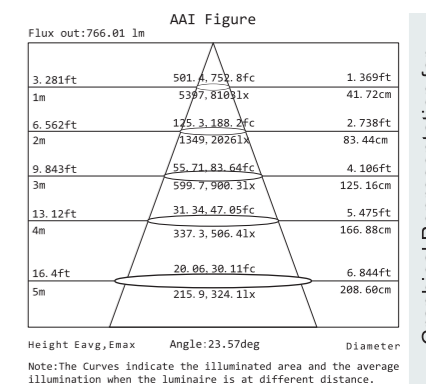

Graphical Representation for D30145 NW 25°