

2x30W COB LED TRACK LIGHT

360° rotatable




Features:

High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment.

Application:

Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.

T3021D	T3031D	T3043D
2-wires Track holder	3-wires Track holder	4-wires Track holder
NETWEIGHT 2.8KG	PACKING 1 PC 35.5X16X28CM	PACKING 6PC 72.5X29.5X50CM

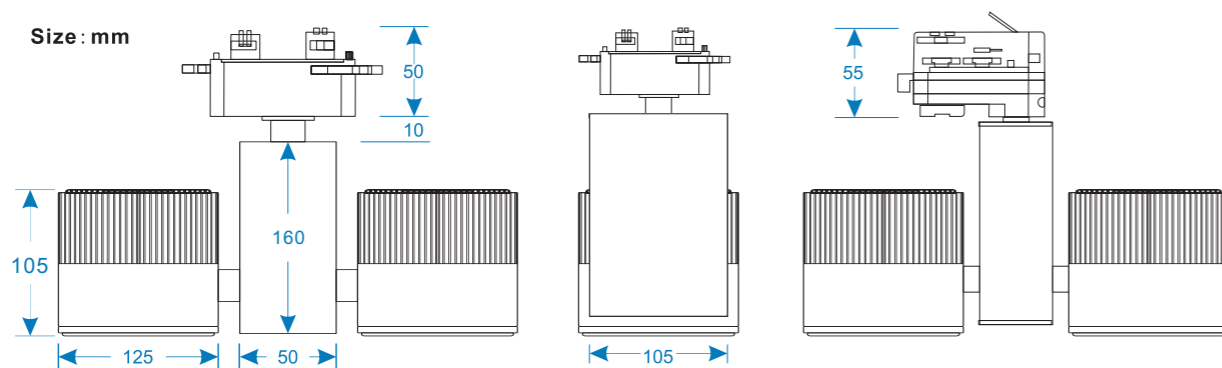

Lamp Parameters :

	Standard	Super-bright
Input Voltage	AC100-277V or AC200-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	60W	
System Consumption	69W	
Led Initial Flux	5100-5500LM	6600-7400 LM
Color Rendering Index	>80	
Working Temperature	-40°C ~ +55°C	
Fireproof Class	V0	
Track light holder	2-wires, 3-wires, 4-wires,	
Color of housing	black,white,silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :

Brand	Lifud
Input	AC100-277V or AC200-240V
Output	27-42VDC,700mA
Power Factor	0.9-0.96
Power Efficiency	87%
Certificate	UL,FCC,CE,SAA,PSE,CQC,TUV UL Certificate Number:E338140 SAA Certificate Number:TUV16071EA
Dimmable	Triac / dali

Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
T3021D	25°/55°	>80	3000K	5100LM	6600LM	AC100-277V AC200-240V
T3031D			4000K	5300LM	7000LM	
T3043D			6000K	5500LM	7400LM	

