

2x50W COB  
LED TRACK LIGHT  
360°rotatable



**Features:**  
High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment.

**Application:**  
Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.

**T5021D**

2-wires Track holder

**NETWEIGHT**  
3.8KG

**T5031D**


3-wires Track holder

**PACKING**  
1 PC  
49.5X29.5X17.5CM

**T5043D**

4-wires Track holder


**PACKING**  
2 PC  
50.5X30.5X37CM

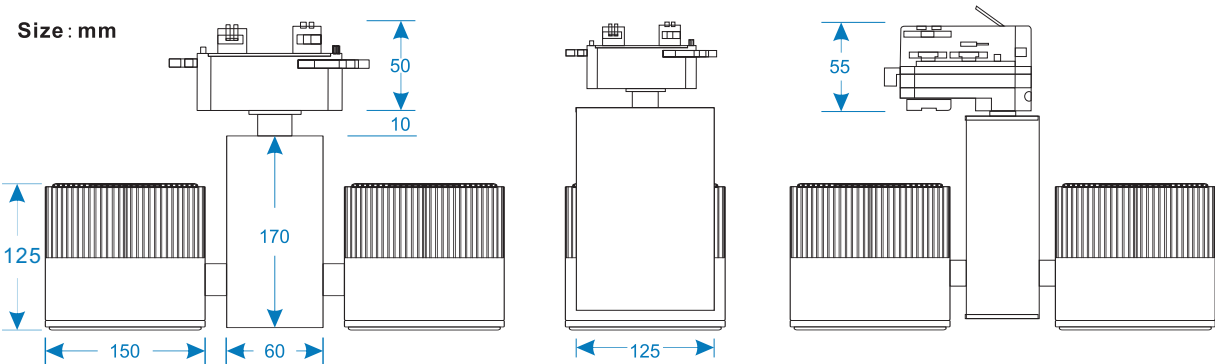


Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100-277V or AC200-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	50W	
System Consumption	110W	
Led Initial Flux	9200-9600LM	11200-12800LM
Color Rendering Index	>80	
Working Temperature	-40℃ ~ +55℃	
Fireproof Class	V0	
Track light holder	2-wires, 3-wires, 4-wires,	
Color of housing	black, white, silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	

Driver Parameters :	
Brand	Lifud
Input	AC100-277V or AC200-240V
Output	DC27-42V, 1200mA
Power Factor	0.9-0.96
Power Efficiency	87%
Certificate	UL, FCC, CE, SAA, PSE, CQC, TUV UL Certificate Number: E338140 SAA Certificate Number: TUV16071EA
Dimmable	Triac / dali


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
T5021D T5031D T5043D	25°/55°	>80	3000K	4600LM	11200LM	AC100-277V AC200-240V
			4000K	9400LM	12200LM	
			6000K	9800LM	12800LM	

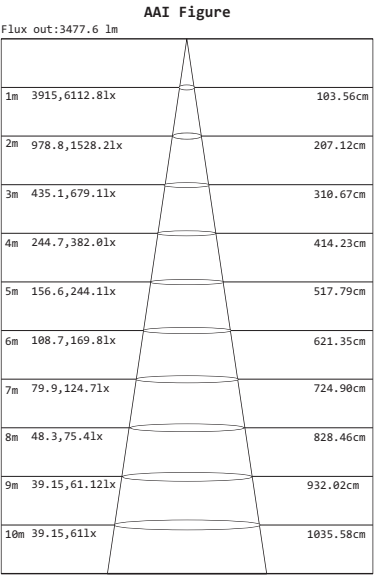

Graphical Representation for  
T5043WW 55°

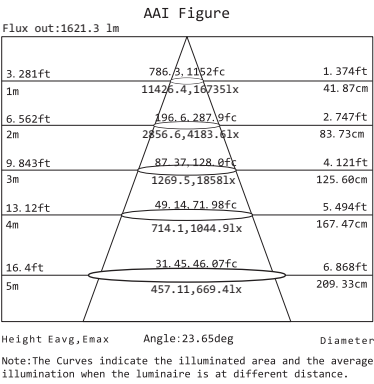

Graphical Representation for  
T5043NW 25°(s)

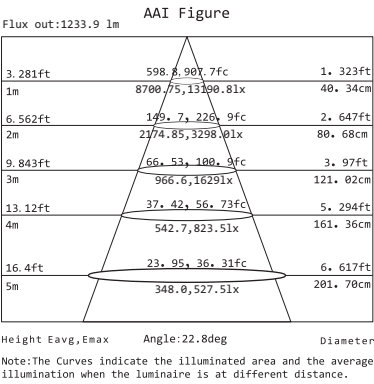

Graphical Representation for  
T5043WW 25°