


RECTANGULAR 2X20W COB LED CEILING LIGHT


180° rotatable



Size: mm

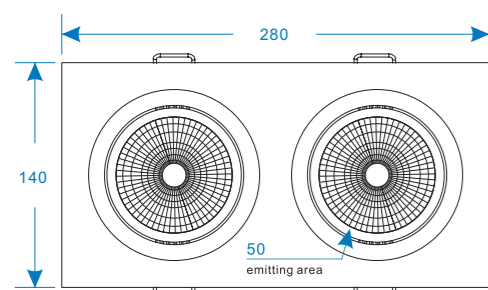

Cutting size: 120X230



C201202


NETWEIGHT 1.8KG	CUTTINGSIZE 120X230MM	PACKING 1PC 27.5*16*12CM	PACKING 8PC 56X33X26CM
---------------------------	---------------------------------	---------------------------------------	-------------------------------------

Features:

High color rendering, uniform luminance, no light spot, no dark space. It was different from the lighting effects of general LED DOWNLIGHT in the market, substitute to the traditional lamp completely, and no maladjustment

Application:

Products are widely used as indoor main illumination lighting in the office, commercial center, shopping mall, supermarket, factory, etc.

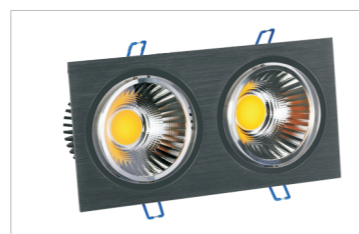


Lamp Parameters :	Standard	Super-bright
Input Voltage	AC100-277V or AC200V-240V	
Frequency Range	50Hz~60Hz	
Led Consumption	40W	
System Consumption	45W	
Led Initial Flux	3300LM-3800LM	4400LM-5200LM
Color Rendering Index	>80	
Working Temperature	-40°C ~ +55°C	
Fireproof Class	V0	
Power cable	2x0.75mm2	
Color of housing	black, white, silver	
Certificate	CE ROHS ERP V0 FCC	
Optical data:	IES	


Driver Parameters :

Brand	Lifud
Input	AC100-277V or AC200V-240V
Output	DC27-42V 500mA
Power Factor	0.9-0.97
Power Efficiency	87%
Certificate	UL, FCC, CE, SAA, PSE, CQC, TUV UL Certificate Number: E338140 SAA Certificate Number: TUV16071EA
Dimmable	Triac / dali / 1-10V / WIFI
MEANWELL: APC-25-500 is optional	


Model No.	Beam angle	CRI	CCT	Illumination	Illumination (S)	Input Voltage(V)
C201202	30°/50°	>80	3000K	3300LM	4400LM	AC100-277V AC200-240V
			4000K	3700LM	4800LM	
			6000K	3800LM	5200LM	

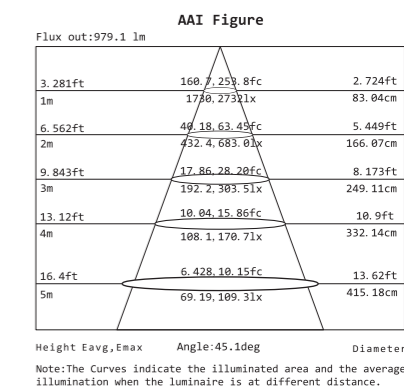


Graphical Representation for
D20120 WW 50° (S)

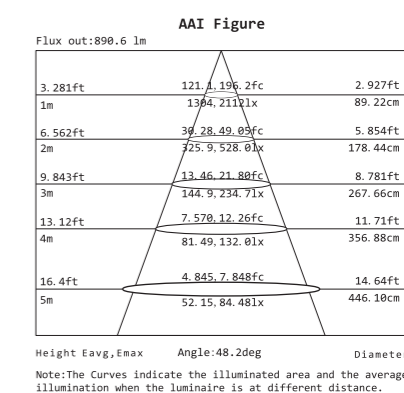

Graphical Representation for
D20120 NW 50°

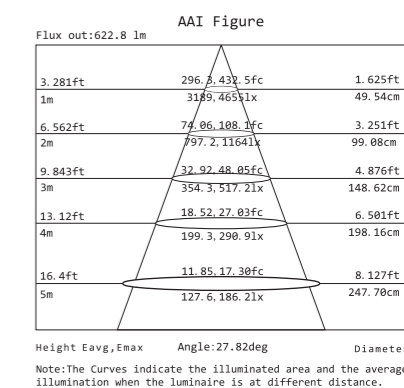

Graphical Representation for
D20120 NW 30° (S)

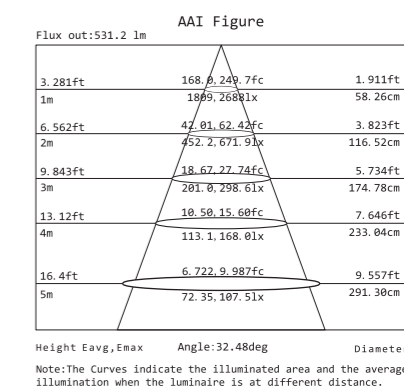

Graphical Representation for
D20120 WW 30°